




**Plant Products**

Industrial Supplier

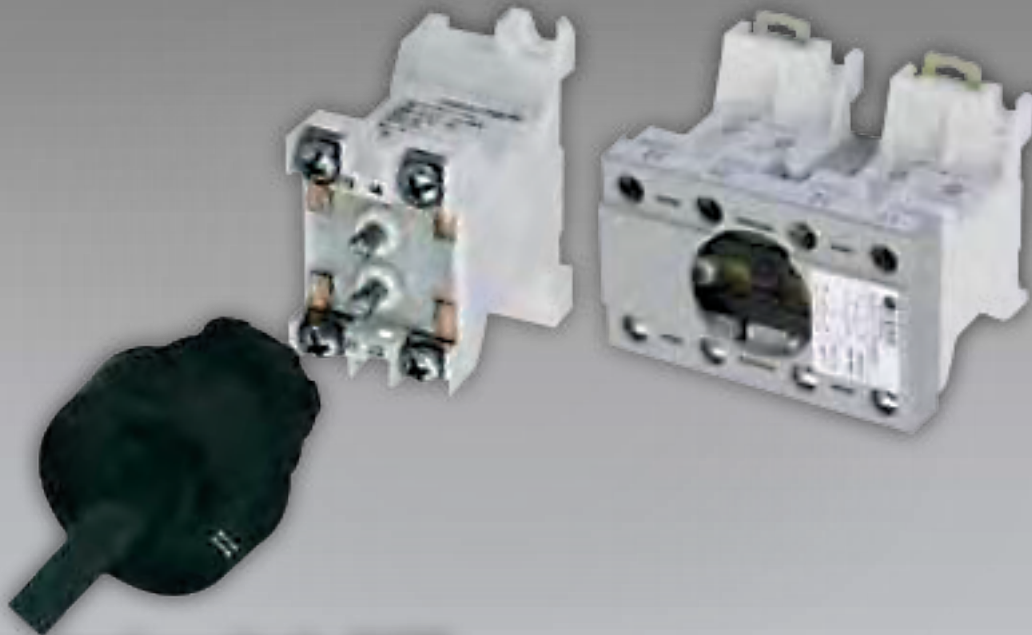

Control switch SCT



**Control Stations**

## Built-in components - mini-control switch



SCT 1 x 2-pole



SCT 1 x 4-pole

### Technical data

<b>Ex-Mini-control switch SCT</b>	
Marking accd. to 2014/34/EU	⊕ II 2 G Ex de IIC/IIB Gb / ⊕ I M2 Ex de I Mb
EC-Type Examination Certificate	IBExU 14 ATEX 1030 U
IECEX Certificate of Conformity	IECEX IBE 14.0005U
Marking accd. to IECEx	Ex de IIC Gb Ex de IIB Gb Ex de I Mb
Operating temperature range	-45 °C up to +80 °C (IIC) -60 °C up to +80 °C (IIB)
Application temperature <sup>1)</sup>	-45 °C up to +55 °C (IIC) -60 °C up to +55 °C (IIB)
Rated voltage	500 V AC
Rated current	16 A
Rated current with gold contact points	0.4 A
Rated making-/rated breaking capacity accd. EN 60947-5-1	AC-15: U <sub>e</sub> 250 V / I <sub>e</sub> 6 A U <sub>e</sub> 500 V / I <sub>e</sub> 4 A DC-13: U <sub>e</sub> 24 V / I <sub>e</sub> 6 A U <sub>e</sub> 220 V / I <sub>e</sub> 1 A
Degree of protection accd. to EN 60529	IP66 (installed condition)
Type of mounting	DIN rail mounting
Enclosure colour	grey
<b>2-pole version</b>	
Connecting terminals	2 x 2.5 mm <sup>2</sup>
Dimensions in mm (L x W x H)	59 x 31 x 45
Weight	0.15 kg
<b>4-pole version<sup>1)</sup></b>	
Connecting terminals	4 x 2.5 mm <sup>2</sup>
Dimensions (L x W x H)	59 x 73 x 45 mm
Weight	0.35 kg

<sup>1)</sup> The limits of the operating temperature range and the max. permissible temperature rise of the components have to be taken into account. See also pages 2.4.34/35.

<sup>2)</sup> The 4-pole pushbutton needs two mounting areas. The actuator will be in the middle of the two mounting areas.

**Built-in components - mini-control switch**









**SCT 1 x 4-pole**



**SCT 1 x 2-pole**

**Ordering code for component (Code 2) Code A - C - D - E**

<b>Code</b>	<b>Component</b>	<b>Ordering code</b>	
<b>A</b>	Mini Control switch	<b>SCT</b>	
<b>Code</b>	<b>Switching system</b>	<b>Version</b>	<b>Code</b>
C	4	spring – engaging – spring	4
			
	5	engaging – engaging – engaging	5
			
	6	engaging – engaging	6
			
	7	spring – engaging – engaging	7
			
	8	engaging – engaging – spring	8
			
	9	engaging – spring	9
			

## Built-in components - mini-control switch



SCT 1 x 2-pole



SCT 1 x 4-pole

### Ordering code for component (Code 2) Code A - C - D - E

Code	Circuit	Contacts	Code	
			silver contact points	gold contact points
D			01	11
			02	12
			03	13
			04	14
			05	15
			07	17
			22	32
			23	33
			21	31
			26	36
			25	35
			27	37
			24	34

## Built-in components - mini-control switch



SCT 1 x 4-pole



SCT 1 x 2-pole

### Ordering code for component (Code 2)

Code	Inscription	Code	Inscription	Code	Inscription	Code
E	0	I	01	0	I	18
	I	II	02	AUS	AUTO	19
	STOP	START	03	AUS	HAND	20
	HAND	AUTO	04	ÖRTLICH	AUS	21
	SENKEN	HEBEN	05	START	NORMAL	22
	REMOTE	LOCAL	06	OFF	0	23
	I	0	07	HAND	OFF	24
	AUS	BETRIEB	08	0	IN	25
	AUS	0	09	MAN	AUTO	26
	AUF	0	10	START	STOP	27
	Enriegelt	0	11	HEBEN	SENKEN	28
	OUT	OF	12	OFF	ON	29
	LOCAL	REMOTE	13	AUS	EIN	30

Other lables on request

### Example for ordering code (Code 2)

Circuit	Switching system	Contacts Code	Ordering code			
			A	C	D	E
<b>Control switch with silver contact points</b>						
<b>Switch can be locked in all positions</b>						
I II	6	01	SCT	6	01 or 21	02
0 I	6	03	SCT	6	03 or 23	01
I II	6	02	SCT	6	02 or 22	02
I 0 II	4	04	SCT	4	04 or 24	07
I 0 II	5	05	SCT	5	05 or 26	07
0 I	7	07	SCT	7	07 or 27	01

**Contact**

Plant Products B.V.

**Office** +31 10 - 434 32 66

**Wouter Pietersen**

**Mobile** +31 6 - 432 02 745

**E-mail** w.pietersen@plantproducts.nl

Westhavenkade 98

3133 AV Vlaardingen

The Netherlands



[www.PlantProducts.nl](http://www.PlantProducts.nl)