




**Plant Products**  
Industrial Supplier



Potentiometer POT

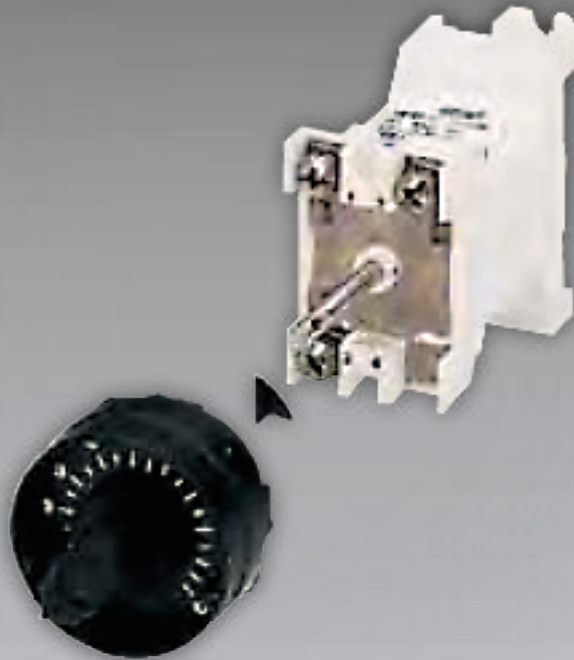

**Control Stations**

## Built-in components - potentiometer



Potentiometer

### Technical data

	Ex-potentiometer POT
Marking accd. to 2014/34/EU	Ⓔ II 2 G Ex de IIC/IIB Gb / Ⓔ I M2 Ex de I Mb
EC-Type Examination Certificate	IBExU 14 ATEX 1030 U
IECEX Certificate of Conformity	IECEX IBE 14.0005U
Marking accd. to IECEx	Ex de IIC Gb Ex de IIB Gb Ex de I Mb
Operating temperature range	-45 °C up to +80 °C (IIC) -60 °C up to +80 °C (IIB)
Application temperature <sup>1)</sup>	-45 °C up to +55 °C (IIC) -60 °C up to +55 °C (IIB)
Rated voltage	up to 250 V
Power consumption (VA)	max. 1 W
Resistance range	100 – 10000 Ohm
Tolerance	± 20 %
Connecting terminals	2 x 2.5 mm <sup>2</sup>
Degree of protection accd. to EN 60529	IP66 (installed condition)
Dimensions (L x W x H)	approx. 59 x 31 x 45 mm
Weight	0.15 kg
Type of mounting	DIN rail mounting
Enclosure colour	grey
Angle of rotation	270°
Scale	0 - 100 %

<sup>1)</sup> The limits of the operating temperature range and the max. permissible temperature rise of the components have to be taken into account. See also pages 2.4.34/35.

### Ordering code for component (Code 2) - code A - C

Code	Component	Code
<b>A</b>	Potentiometer	<b>POT</b>
Code	Resistance	Code
C	0 - 100 Ohm	01
	0 - 220 Ohm	02
	0 - 470 Ohm	03
	0 - 1000 Ohm	04
	0 - 2200 Ohm	07
	0 - 4700 Ohm	05
	0 - 10000 Ohm	06

### Example for ordering code (Code 2)

Content	Code
<b>Potentiometer 1 W 25 % tolerance</b>	
0 - 100 Ohm	POT 01
0 - 470 Ohm	POT 03
0 - 4700 Ohm	POT 05

**Contact**

Plant Products B.V.

**Office** +31 10 - 434 32 66

**Wouter Pietersen**

**Mobile** +31 6 - 432 02 745

**E-mail** w.pietersen@plantproducts.nl

Westhavenkade 98

3133 AV Vlaardingen

The Netherlands



[www.PlantProducts.nl](http://www.PlantProducts.nl)